

MAGNETIC SHIELDED SURFACE-MOUNT POWER INDUCTORS

SDRH5028 SERIES

FEATURES:

- Magnetically Shielded Structure
- Low DC Resistance
- Large current up to 4.0A
- Excellent Mechanical Strength
- High Reliability and Excellent Solderability
- Low and square Profile
- High heat resistance

COMMON APPLICATIONS:

- VCRs, Notebook, DC/DC Converters
- Video Digital Cameras
- Communication System
- Automotive Systems Power supplier
- LCD PDP Televisions
- Hard Disk Drives, Topset, XDSL
- Network Systems
- Computer Peripheral Equipment




ELECTRICAL CHARACTERISTICS:

Part Number	L (μ H)	Test Freq (kHz)	DCR Ω Max	IDC Max A
SDRH5028-1R0□	1.0	100	0.015	4.00
SDRH5028-2R2□	2.2	100	0.029	2.41
SDRH5028-3R3□	3.3	100	0.034	2.36
SDRH5028-4R7□	4.7	100	0.045	1.87
SDRH5028-5R6□	5.6	100	0.052	1.60
SDRH5028-6R8□	6.8	100	0.068	1.51
SDRH5028-100□	10	1	0.090	1.33
SDRH5028-150□	15	1	0.142	1.05
SDRH5028-220□	22	1	0.208	0.86
SDRH5028-330□	33	1	0.257	0.72
SDRH5028-470□	47	1	0.352	0.62
SDRH5028-680□	68	1	0.525	0.51
SDRH5028-101□	100	1	0.801	0.43
SDRH5028-121□	120	1	0.850	0.34
SDRH5028-151□	150	1	1.100	0.26
SDRH5028-181□	180	1	1.190	0.24
SDRH5028-221□	220	1	1.530	0.20

□:1. K= $\pm$ 10%,M= $\pm$ 20%,N= $\pm$ 30%

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS:


DIMENSIONS IN:mm

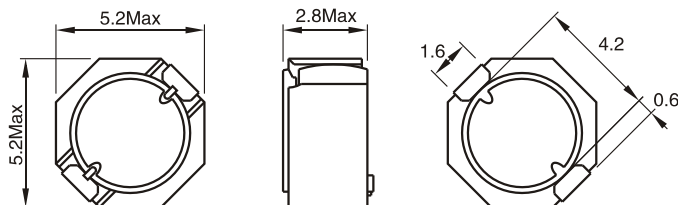

CONSTRUCTION



LAND PATTERNS



- Inductor Testing: HP4284A (Equivalent acceptable)
- DCR:QuadTech 1880 Milliohm meter
- Q- HP4342A – SRF-HP4191A
- IDCMax current is decreased 10% against its initial value
- Operating temperature: -40°C to $+105^{\circ}\text{C}$
- Storage Temperature: -40°C to $+105^{\circ}\text{C}$
- Solder methods: Vapor Phase,Infrared Reflow
- Resistance to soldering heat: 260°C for 10 seconds
- Solvent resistance: Conforms to MIL-STD-202E
- Marking: Inductance & Tolerance

Note:All specifications subject to change without notice.